

X1-HYBRID G4

D:Should be used without matebox
M:Should be used with matebox

SINGLE-PHASE
3.0~7.5kW

Features

High-efficient

- 150% PV oversized and 110% overload output
- Maximum 120% overload output
- Higher efficiency on charging and discharging, up to 96.9%
- Built-in shadow tracking function

Economic

- Maximum 16A DC input current, support for high power solar panel
- Store the surplus energy from PV to battery
- Low start output voltage makes inverter longer working time
- Less energy loss on battery to inverter




Intelligent

- Switchover time <10ms
- Quick configuration with U-disk
- Lithium & Lead-acid battery compatible
- CT compatible, loads respond within 0.3s
- Intelligent loads management(e.g., Heat pump)
- On & Off-grid parallel function, up to 15kW
- 5 work modes, 4 charging periods available
- VPP ready, ancillary service in power market

Safe

- IP65 protection level
- Integrated SPD

SOLUTION DESIGN

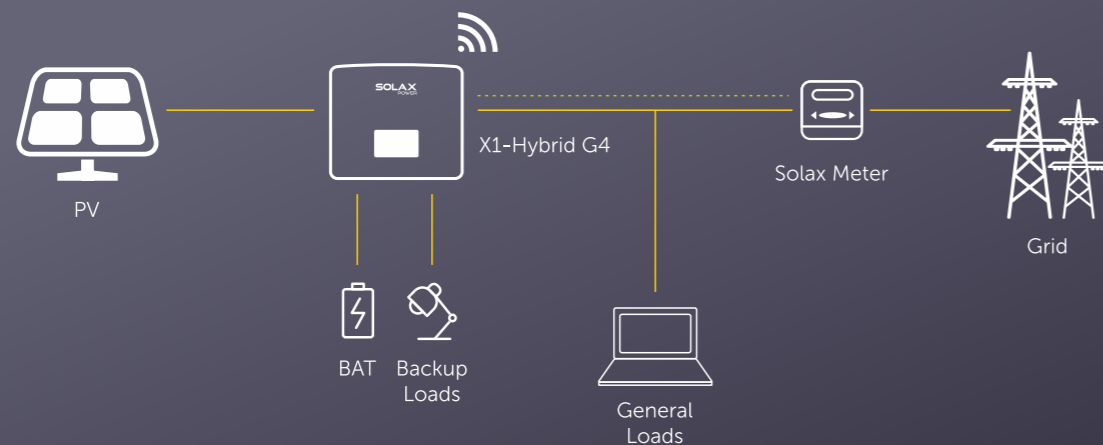

X1-HYBRID G4

SINGLE-PHASE

X1-HYBRID-3.0-D
X1-HYBRID-3.0-M

X1-HYBRID-3.7-D
X1-HYBRID-3.7-M

X1-HYBRID-5.0-D
X1-HYBRID-5.0-M

X1-HYBRID-6.0-D
X1-HYBRID-6.0-M

X1-HYBRID-7.5-D
X1-HYBRID-7.5-M

DC INPUT

Max. PV array input power [Wp]	4500	5500	7500	9000	10000
Max. PV input voltage [V]	600	600	600	600	600
Start output voltage [V]	90	90	90	90	90
Nominal input voltage [V]	360	360	360	360	360
MPP voltage range [V]	70~550	70~550	70~550	70~550	70~550
No. of MPP trackers/Strings per MPP tracker	2(1/1)	2(1/1)	2(1/1)	2(1/1)	2(1/1)
Max. input current(input A/input B) [A]	16/16	16/16	16/16	16/16	16/16
Max. short circuit current(input A/input B) [A]	18/18	18/18	18/18	18/18	18/18

AC INPUT & OUTPUT

Nominal AC output power [W]	3000	3680	5000 (4600 for DE, 4999 for AU)	6000	7500 (6900 for PEA)
Max. AC output apparent power [VA]	3300	3680	5500 (4600 for DE, 4999 for AU)	6600	7500 (7300 for PEA)
Max. AC output current [A]	14.4	16	23.9 (20 for DE, 21.7 for AU)	28.6	32.6 (33 for PEA)
Max. AC input apparent power [VA]	6300	7360	9200	9200	9200
Max. AC input current [A]	27.4	32	40	40	40
Nominal AC voltage [V]	180~270				
Nominal grid frequency/Grid frequency range [Hz]	50/60				
Displacement power factor	0.8 leading~0.8 lagging				
THDi (rated power) [%]	<2				

BATTERY DATA

Battery type	Li-ion battery/Lead-Acid Battery
Battery voltage range [V]	80~480
Max. continuous charge/discharge current [A]	30

EPS(OFF-GRID OR BACK-UP) OUTPUT (WITH BATTERY)

Nominal output power [W]	3000	3680	5000	6000	7500
Peak apparent power [VA]	3600, 1h	4416, 1h	6000, 1h	7200, 10min	7500
Max. continuous current [A]	13	16	21.7	26.1	32.6
Nominal voltage[V]; Frequency [Hz]	230; 50/60				
Switch time [ms]	internal switch <10, external switch <100				
Parallel operation	YES				

SYSTEM DATA

Max. efficiency [%]	97.6
Euro. efficiency [%]	97.0
Battery charge/discharge efficiency [%]*1	97.0/97.0
Standby consumption [W] @Night	<3
Degree of protection	IP65
Operating temperature range [°C]	-35~+60 (derating at 45°C)
Max. operation altitude [m]	<3000
Humidity [%]	0~100
Typical noise emission [dB]	<30
Storage temperature [°C]	-40~+65
Dimensions(WxHxD) [mm]	482*417*181
Net weight [kg]	24
Cooling concept	Nature cooling
Communication interfaces	CT/ Meter(optional)/ External control RS485/ Pocket series (optional)/ DRM/ USB Upgrade/ NTC

STANDARD

Safety	EN/IEC62109-1/-2
EMC	EN61000-6-1/2/3/4;EN61000-3-2/3/11/12
Certification	VDE4105 /G99 /G98 / AS4777 / EN50549/ CEI 0-21 /IEC61727/RD1699/UNE 206007-1/NRS 097-2/VDE0124/PEA and so on

*1: PV to BAT Max. efficiency 97.0%, BAT to AC Max. efficiency 97.0%

X3-HYBRID G4

D:Should be used without matebox
M:Should be used with matebox

THREE-PHASE
HYBRID INVERTER

5.0~15kW

Features

High-efficient

- 150% PV oversized and 110% overload output
- Maximum 150% overload output
- Higher efficiency on charging and discharging, up to 97.45%
- Built-in shadow tracking function

Economic

- Maximum 16A DC input current, support for high power solar panel
- Store the surplus energy from PV to battery
- Low start output voltage makes inverter longer working time
- Less energy loss on battery to inverter




Intelligent

- Switchover time <10ms
- Quick configuration with U-disk
- Lithium & Lead-acid battery compatible
- CT compatible, loads respond within 0.3s
- Intelligent loads management(e.g., Heat pump)
- On & Off-grid parallel function, up to 150kW
- 5 work modes, 4 charging periods available
- VPP ready, ancillary service in power market
- Three-phase unbalanced output50% nominal output power on single phase at most

Safe

- IP65 protection level
- Integrated SPD

SOLUTION DESIGN

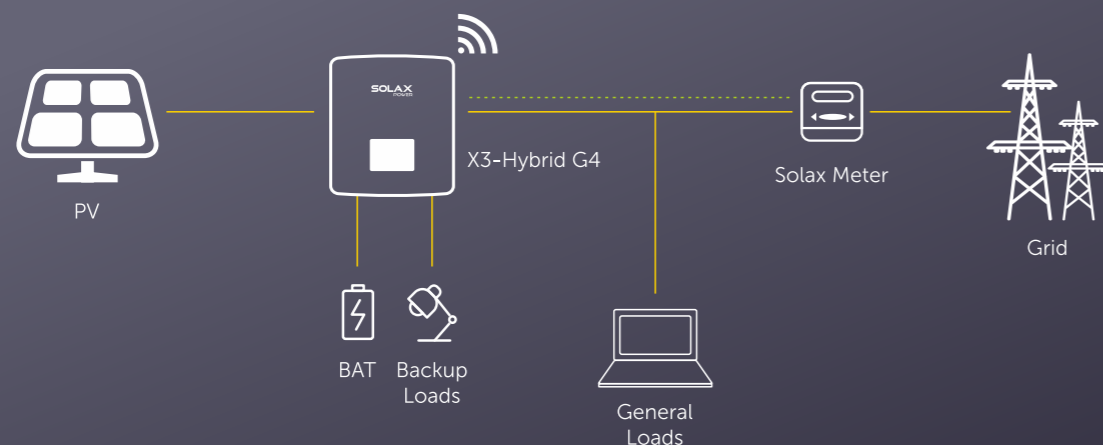

X3-HYBRID G4

THREE-PHASE

X3-HYBRID-5.0-D
X3-HYBRID-5.0-M

X3-HYBRID-6.0-D
X3-HYBRID-6.0-M

X3-HYBRID-8.0-D
X3-HYBRID-8.0-M

X3-HYBRID-10.0-D
X3-HYBRID-10.0-M

X3-HYBRID-12.0-D
X3-HYBRID-12.0-M

X3-HYBRID-15.0-D
X3-HYBRID-15.0-M

DC INPUT

Max. PV array input power [Wp]	8000	10000	12000	15000	18000	18000
Max. PV input voltage [V]	1000	1000	1000	1000	1000	1000
Start output voltage [V]	200	200	200	200	200	200
Nominal input voltage [V]	640	640	640	640	640	640
MPP voltage range [V]	180~950	180~950	180~950	180~950	180~950	180~950
No. of MPP trackers/Strings per MPP tracker	2(1/1)	2(1/1)	2(2/1)	2(2/1)	2(2/1)	2(2/1)
Max. input current(input A/input B) [A]	16/16	16/16	26/16	26/16	26/16	26/16
Max. short circuit current(input A/input B) [A]	18/18	18/18	30/18	30/18	30/18	30/18

AC INPUT & OUTPUT

Nominal AC output power [W]	5000	6000	8000	10000	12000	15000 (14000 for PEA)
Max. AC output apparent power [VA]	5500	6600	8800	11000	13200	15000
Max. AC output current [A]	8.1	9.7	12.9	16.1	19.3	24.1
Max. AC input apparent power [VA]	10000	12000	16000	20000	20000	20000
Max. AC input current [A]	16.1	19.3	25.8	32.0	32.0	32.0
Nominal AC voltage [V]	415/240; 400/230; 380/220					
Nominal grid frequency/Grid frequency range [Hz]	50/60					
Displacement power factor	0.8 leading~0.8 lagging					
THDi (rated power) [%]	<3					

BATTERY DATA

Battery type	Li-ion battery
Battery voltage range [V]	180~650
Max. continuous charge/discharge current [A]	30

EPS(OFF-GRID OR BACK-UP) OUTPUT (WITH BATTERY)

Nominal output power [W]	5000	6000	8000	10000	12000	15000
Peak apparent power [VA]	7500,60s	9000, 60s	12000,60s	15000, 60s	15000, 60s	16500, 60s
Max.continuous current [A]	7.2	8.7	11.6	14.5	17.5	21.8
Nominal voltage[V]; Frequency [Hz]	400/230; 50/60					
Switch time [ms]	<10					
Parallel operation	YES (Details refer to website)					

SYSTEM DATA

Max. efficiency [%]	98.0
Euro. efficiency [%]	97.7
Battery charge/discharge efficiency [%]*1	98.5/97.5
Standby consumption [W] @Night	<5W for cold standby
Degree of protection	IP65
Operating temperature range [°C]	-35~60 (derating at +45°C, charge derating at +35°C)
Max. operation altitude [m]	<3000
Humidity [%]	0~100
Typical noise emission [dB]	<35
Storage temperature [°C]	-40~+70
Dimensions(WxHxD) [mm]	503*503*199
Net weight [kg]	30
Cooling concept	Nature cooling
Communication interfaces	CT/ Meter/ Pocket Wi-Fi(optional)/ DRM/ USB/ RS485

STANDARD

Safety	EN/IEC62109-1/-2
EMC	EN61000-6-1/2/3/4;EN61000-3-2/3/11/12
Certification	VDE4105 /G99 /G98 / AS4777 / EN50549/ CEI 0-21 /IEC61727/VDE 0124/PEA and so on

*1: PV to BAT Max. efficiency 98.5%, BAT to AC Max. efficiency 97.0%